


FEUMAT patented rotation device for extinguishers of 12 kg powder max.



Made in Germany



**FEUMAT patented rotation device,
for fire extinguishers of 12 kg powder
Item no.: 9001**

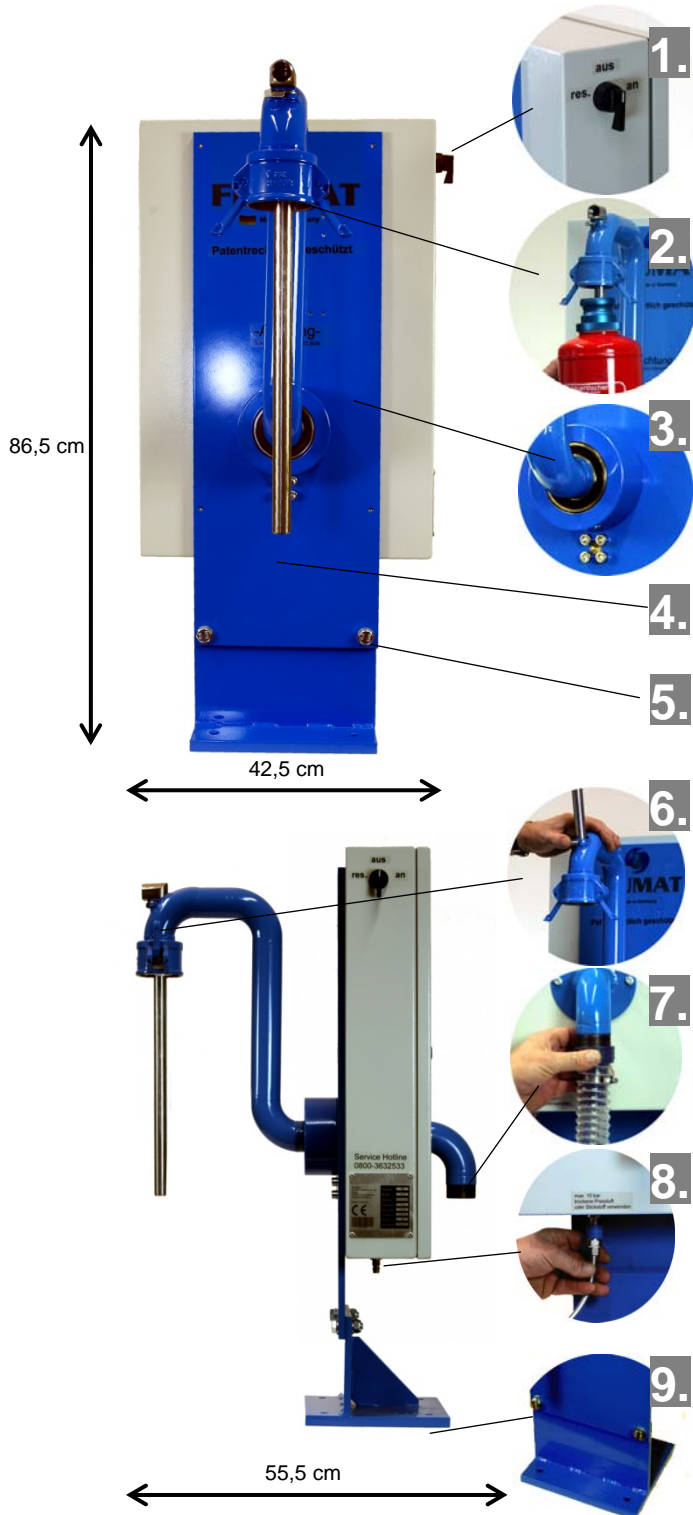

1. On/Off switch incl. Reset safety position.
2. FEUMAT connection system, suitable for all inner and outer threads of the common fire extinguisher types and brands; tailor-made connecting adapters available on request. Absolute dust freeness is guaranteed by the connection system.
3. Heavy load bearing from automotive industry. 180° rotation guarantees loosening of extinguisher powder, independent from the condition and the degree of caking.
4. Housing and metal parts with solid and wear resistant powder coating.
5. Different installation plates for wall or floor installation.
6. Removable stainless steel suction tube for easy connection of extinguishers.
7. 1 1/2" sleeve nut suction connection, choice of 32 mm or 40 mm connection piece including coarse filter. Sleeve nut for easy and comfortable cleaning. Pneumatic drive for dry compressed air or nitrogen; min. 3,8, max. 10 bar.
8. Connection for dry compressed air or nitrogen (min. 3,8, max 10 bar) for pneumatic driving of the rotation device.
9. bed plate with 4 holes for safe fixing of the FEUMAT rotation device for to work benches, work tables or plates.

Technical details:

- Weight: 45,2 kg.
- Dimensions: (h/w/d): 86,5 / 42,5 / 55,5 cm.
- Dry compressed air or nitrogen: min. 3,8 bar, max. 10 bar